


LEGEND

- ① "MINI CLIK" RAIN SENSOR.
- ② DIG PLASTIC PIPE CAP 1" CAP PART No. 23-001 or 1.5" CAP PART No. 23-053 WITH HOLE FOR WIRES.
- ③ DRILL TWO 3/16 HOLES IN PIPE FOR SENSOR BRACKET.
- ④ (2) #8-32 MACHINE SCREWS WITH WASHER, LOCK WASHER AND NUT.
- ⑤ 1" or 1.5" GALVANIZED PIPE 6 to 10 FEET HIGH.
- ⑥ 12" X 12" CONCRETE BASE 8" DEEP MINIMUM.
- ⑦ 1" or 1.5" PIPE ELBOW.
- ⑧ FINISH GRADE.
- ⑨ 6" ROUND VALVE BOX.
- ⑩ SKIT ADAPTER PART NO. 8821-4 USE WITH EACH SENSOR.
- ⑪ TO CONTROLLER OR VALVE.
- ⑫ (4) DRY SPlice CONNECTORS.
- ⑬ NORMALLY CLOSED WIRE FROM SENSOR.
- ⑭ COMMON WIRE FROM SENSOR.
- ⑮ 1" or 1.5" NIPPLE.
- ⑯ GRAVEL.

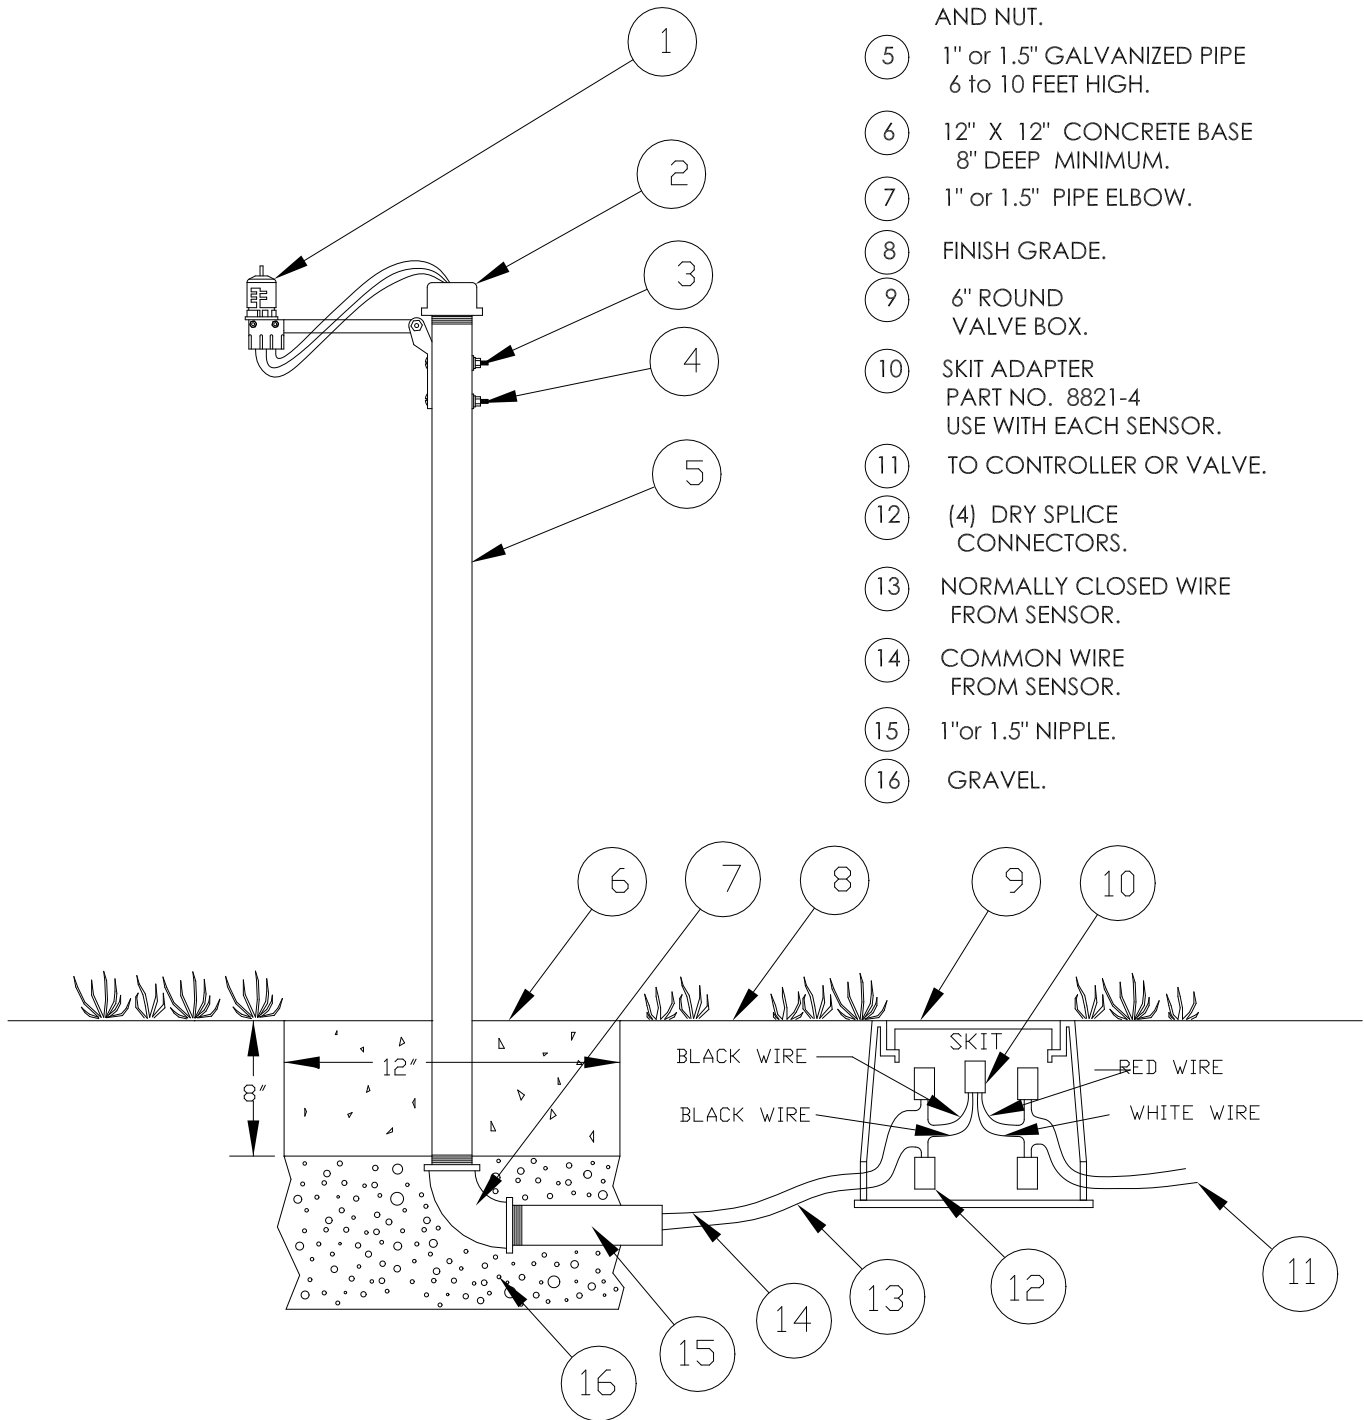

5

RAIN SENSOR ASSEMBLY (COLUMN MOUNTED)  
 USING SKIT 8821-4 RAIN SENSOR